













Technical Specifications For

The Open Gym Equipments(Including Supply and Fixing, all Complete works)

S.N.	Description of Goods	Requirements
1	<p>Single Rowing Machine (for Outdoor use)</p> 	<p>Material: Galvanized steel tubes (processed with carbon-dioxide arc welding, static spraying paint, high temperature solidity). project plastic. Color: Green, Yellow, Red, Purple. Brown. Blue or Customized Function:: Enhance the muscle strength of upper limbs, shoulders, chest and the back. Size(mm): 1342*988*952(L*W*H) Volume: 0.5CBM Falling Height:400mm</p>
2	<p>Abdominal Fitness Combination (for Outdoor use)</p> 	<p>Dimension: 1879*1236*653mm (L*W*H) Material Galvanized steel tubes (processed with carbon-dioxide arc welding, static spraying paint, high temperature solidity), project plastic. Exercise Part Abdominal muscles and back Color: Green, Yellow, Red, Purple, Brown, Blue or Customized Function: To strengthen the muscles on the abdominal and back and improve elasticity; Instruction Place your legs in or on the cross bar, and to hook the cross bar below with legs with 2 hands cross behind head-doing sit-up movement on the machine 2 people are permitted at the same time Install Method 1 Underground, if your place is ground or grass 2 Concrete, if you place is covered with concrete and the thickness is more than 10cm Packing Cotton inside and pp film outside Volume 10CBM</p>
3	<p>Double Elliptical Machine</p> 	<p>Dimension: 1500*940*1585 mm (L*W*H) Material: Steel or galvanized steel tubes (processed with carbon dioxide arc welding, static spraying paint, high temperature solidity). Color: Green, Yellow, Red, Purple, Brown, Blue or Customized by You. Exercise Part : Arms. Function: Increase torso strength and flexibility Instruction Hold the horizon bar with two hands, and do up and down Player Age Kids and old adults Install Method 1. Underground, if your place is ground or grass 2. Concrete, if you place is covered with concrete and the thickness is more than 10cm. Apply to Communities, residential park, uptown park, leisure place, activity center, garden, playground. 8.50 x 11.00 in Volume 1.5 CBM Packing: Cotton in side and pp film outside.</p>

4	Leg Press, Upright & Twister combined (for Outdoor use)		Galvanized steel pipe. Color powder coated;as per standard size and thickness.
5		Mild Steel,Thickness of pipes Not Less Than 3 mm.Main frame pipe 110-165 MM (as/design) ,Swinging paddle pipe 40-80mm,Handle Pipes 30-60 MM,Plastic Alloy /Nylon footrest with appropriate thickness.Reinforced foot pedals for extended life.Permanent lubricated sealed bearing of reputed brand for maintenance free usage,All open ends of pipe either sealed in or closed by GI/LLDPE cap for user safety.Paint: All Weather Double Layer Powder Coated Paint Thickness of Base plate for fixing : Not less than 8 mm	
6	Cycle		Specifications ;Material:Pre Galvanized Mild Steel,Thickness of pipes Not Less Than 3 mm.Main frame pipe 110-165 MM (as/design) ,Handle frame and other frame 30-60mm (as/design)Revolving paddles & Wheels heavy dully M.S plate PVC cover Handle with dia 30-60 mm, Plastic Alloy / HDPE seat with appropriate thickness with effecitevely connected on frame Permanent lubricated sealed bearing of reputed brand for maintenance free usage Plastic Alloy /Nylon footrest with appropriate thickness.Reinforced foot pedals for extended life.Nylon covers for covering the Nuts & Bolt All open ends of pipe either sealed in or closed by GI/LLDPE cap for user safety.Paint: All Weather Double Layer Powder Coated Paint Thickness of Base plate for fixing : Not less than 8 mm
7	AIR SWING		Material:Pre Galvanized Mild Steel, Thickness of pipes Not Less Than 3 mm. Main frame pipe 110-165 MM (as/design) , Swinging paddle pipe 40-80mm,Handle Pipes 30-60 MM,Plastic Alloy /Nylon footrest with appropriate thickness. Reinforced foot pedals for extended life.Permanent lubricated sealed bearingof reputed brand for maintenance free usage,All open ends of pipe either sealed in or closed by GI/LLDPE cap for user safety.Paint: All Weather Double Layer Powder Coated Paint Thickness of Base plate for fixing : Not less than 8 mm

8	ARM AND SHOULDER WHEEL		Material: Pre Galvanized Mild Steel, Thickness of pipes Not Less Than 3 mm. Main frame Pipe Dia 100 –150 MM (as/design) Handle frame 25-50mm (as/design) Permanent lubricated sealed bearing of reputed brand for maintenance free usage. Paint: All Weather Double Layer Powder Coated Paint. Thickness of Base plate for fixing : Not less than 8 mm
9	Push & Pull up chair		Material: Pre Galvanized Mild Steel, Thickness of pipes Not Less Than 3 mm. Main frame pipe 110-165 MM (as/design) ,L shape pipe is dia 70-100 mm, Swing Arm is dia 30-60 mm, PVC Cover Handle with dia 30-60mm, Plastic Alloy / HDPE seat with appropriate thickness with effectively connected on frame. Permanent lubricated sealed bearing of reputed brand for maintenance free usage. All open ends of pipe either sealed in or closed by GI/LLDPE cap for user safety. Paint: All Weather Double Layer Powder Coated Paint Thickness of Base plate for fixing : Not less than 8 mm
10	Big playstation		Ht. of 10.5', length of 28', wide of 15' Metal : Min 14 gauge pipe Fiber thickness of min 3.5 mm double slide length 9' Single slide length 8.5' Tunnel length 9.5' Spiral height 4'

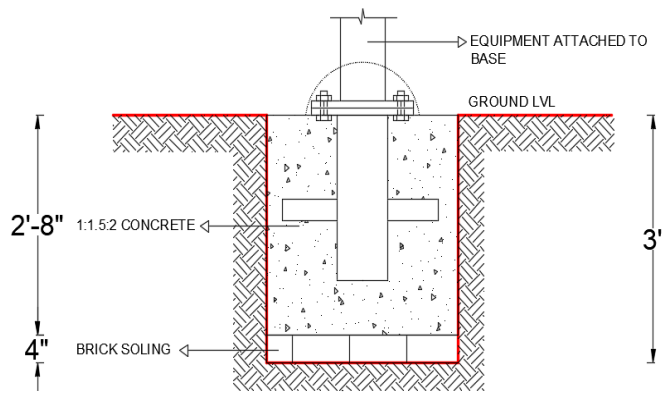

- A. Brochure with Specifications and others essential details(Certificates) must be submitted.
- B. Warranty Period: Minimum period of 2 years.In case of Problems occurred within warranty period must be solved within 24 hours.
- C. Most incorporate all necessary accessories in case of missing BOQ in order to complete whole installation package.
- * Image: (The product images are for illustration purposes only and may not be an exact representation of products)
- * Dimension: Variation on overall dimension not more than (+/-) 100 mm.